



THIS IS **KEY**

**INDUSTRIAL** HOSE PRODUCTS



**FIRE SUPPRESSION • INDUSTRIAL DEWATERING • WASH DOWN**



# TABLE OF CONTENTS



|                      |                   |
|----------------------|-------------------|
| Hose Experts         | 1                 |
| Eco-10               | 2                 |
| Eco-5                | 4                 |
| Mil-Spec             | 6                 |
| Flame Out            | 8                 |
| Dura-Flow            | 10                |
| Pro-Flow             | 12                |
| Industrial LDH       | 14                |
| Rack Hose            | 16                |
| Reel Lite            | Inside Back Cover |
| Pencil Line          | Back Cover        |
| Warranty Information | Back Cover        |

“We are dedicated to the manufacture and delivery of the highest quality hose products, combining the best in raw materials with expert craftsmanship.”





## FOR ALL YOUR INDUSTRIAL HOSE NEEDS

With more than three decades of service, Key Hose is committed to being the industry leader in the design and manufacture of premier industrial hose products by combining our collective expertise with more manufacturing capacity than any other hose manufacturer in the world. Striving to become the “best hose company in the world”, we’ve grown from our original 16 looms to reach triple-digit loom capacity with multiple facilities and expert manufacturing all proudly based in south east Alabama.

## THE HOSE EXPERTS

Key Hose is the industry leader in the design and manufacture of woven jacketed and rubber covered industrial hose products. We have continually improved every process and product we offer to better meet ever changing industrial applications. Our unique weaving techniques for jacketed hose reduce friction loss 20% to 50% while our innovative yarn combinations result in jackets that are lighter and stronger. Industrial hose that is on time, on target and on budget...this is Key.

## KEY-LOK TECHNOLOGY

Key-Lok, exclusively from Key Hose, is an acrylic based polymer employing revolutionary nano-pigment technology. More than doubling the abrasion resistance of your hoseline compared to untreated hoselines, this proprietary formula also offers unprecedented color fastness to provide years of vibrant, visual hose identification. Key-Lok is non-toxic, environmentally safe and highly durable. Mechanically infused and heat-set to encapsulate, soak and protect each yarn while also bonding the fibers of the weave to the protective polymers of the formula. Finish off your jacketed hoselines with the best in added abrasion resistance and color longevity, This Is Key.

## THIS IS KEY



# IECO-10

Lightweight, double jacket construction, combining 100% premium ring spun staple and filament polyester fibers over a thin wall, high tensile, EPDM rubber liner. The outer jacket is mildew resistant and available with "Key-Lok" acrylic based polymer impregnation for abrasion and moisture resistance. A proprietary reverse twill weave construction reduces friction loss, while engineered yarn selections lighten the hose up to 25% compared to competitive offerings.


## FOR **SUPPLY AND ATTACK** APPLICATIONS






# LIGHTWEIGHT RUBBER LINED FIRE HOSE

This reliable, impregnated double jacket fire hose is tested to 600 and 800 psi, meets MIL-H-24606 latest edition for abrasion resistance and is UL Listed. Features a 10-year warranty and lifetime liner delamination guarantee. Eco-10 can be coupled with 6061-T6 aluminum threaded couplings or forged Storz. Brass, special threads or other custom features available upon request.

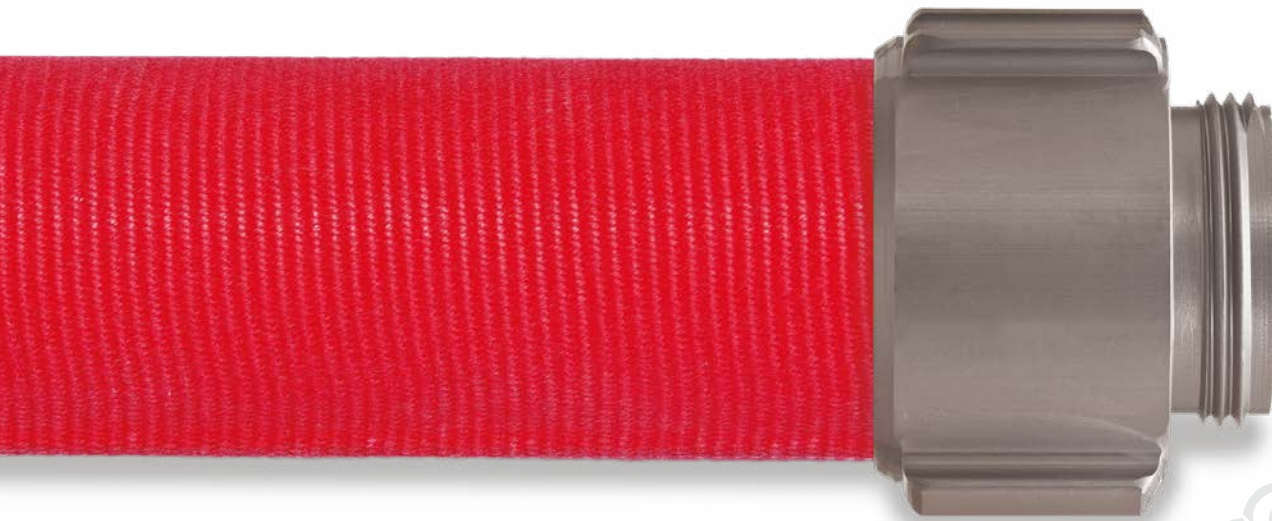

| Diameter                          | Part No.     | Service Test | Proof Test | Burst Test | Bowl Size                         | Weight Uncoupled |
|-----------------------------------|--------------|--------------|------------|------------|-----------------------------------|------------------|
| 1"                                | DP10-800     | 400 psi      | 800 psi    | 1200 psi   | 1 <sup>3</sup> / <sub>8</sub> "   | 0.14 lbs/ft      |
| **1 <sup>1</sup> / <sub>2</sub> " | DP15-800-ECO | 400 psi      | 800 psi    | 1200 psi   | 1 <sup>15</sup> / <sub>16</sub> " | 0.23 lbs/ft      |
| *1 <sup>3</sup> / <sub>4</sub> "  | DP17-800-ECO | 400 psi      | 800 psi    | 1200 psi   | 2 <sup>1</sup> / <sub>16</sub> "  | 0.28 lbs/ft      |
| *2"                               | DP20-800     | 400 psi      | 800 psi    | 1200 psi   | 2 <sup>2</sup> / <sub>5</sub> "   | 0.31 lbs/ft      |
| **2 <sup>1</sup> / <sub>2</sub> " | DP25-800-ECO | 400 psi      | 800 psi    | 1200 psi   | 3"                                | 0.42 lbs/ft      |
| *3"                               | DP30-800-ECO | 400 psi      | 800 psi    | 1200 psi   | 3 <sup>3</sup> / <sub>8</sub> "   | 0.56 lbs/ft      |
| 4"                                | DP40-600     | 300 psi      | 600 psi    | 900 psi    | 4 <sup>1</sup> / <sub>2</sub> "   | 0.82 lbs/ft      |
| 5"                                | DP50-600     | 300 psi      | 600 psi    | 900 psi    | 5 <sup>1</sup> / <sub>2</sub> "   | 1.14 lbs/ft      |

\*UL Listed to 400 psi | \*\*UL Listed to 400 psi and FM Approved

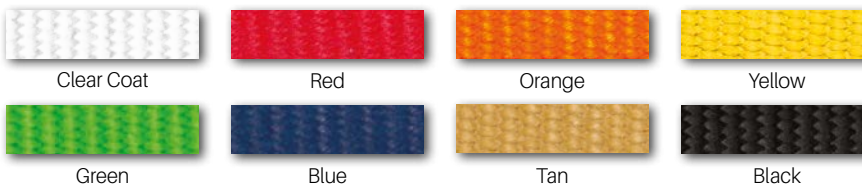

NFPA Colors Available

MADE IN  
**USA** ★



# IECO-5

Lightweight, single jacket construction, combining 100% polyester ring spun staple and filament fibers over a thin wall, high tensile, EPDM rubber liner. The outer jacket is mildew resistant and available with "Key-Lok" acrylic based polymer impregnation for unmatched abrasion and moisture resistance. A proprietary reverse twill weave construction reduces friction loss, while high tensile yarn combinations allow hose to be 25% lighter. Hose features a 5-year warranty, is FM Approved, tested to 600 psi, and UL Listed\*.

## SINGLE JACKET INDUSTRIAL HOSE






# RUBBER LINED INDUSTRIAL HOSE

Eco-5 can be coupled with 6061-T6 aluminum threaded couplings or Storz.  
Brass, special threads or other custom features available upon request.



| Diameter                          | Part No. | Service Test | Proof Test | Burst Test | Bowl Size                        | Weight Uncoupled |
|-----------------------------------|----------|--------------|------------|------------|----------------------------------|------------------|
| 1"                                | SP10-600 | 300 psi      | 600 psi    | 900 psi    | 1 <sup>3</sup> / <sub>16</sub> " | 0.10 lbs/ft      |
| **1 <sup>1</sup> / <sub>2</sub> " | SP15-600 | 300 psi      | 600 psi    | 900 psi    | 1 <sup>3</sup> / <sub>4</sub> "  | 0.15 lbs/ft      |
| *2"                               | SP20-600 | 300 psi      | 600 psi    | 900 psi    | 2 <sup>1</sup> / <sub>4</sub> "  | 0.17 lbs/ft      |
| **2 <sup>1</sup> / <sub>2</sub> " | SP25-600 | 300 psi      | 600 psi    | 900 psi    | 2 <sup>3</sup> / <sub>4</sub> "  | 0.28 lbs/ft      |

\*UL Listed to 250 psi | \*\*UL Listed to 250 psi and FM Approved

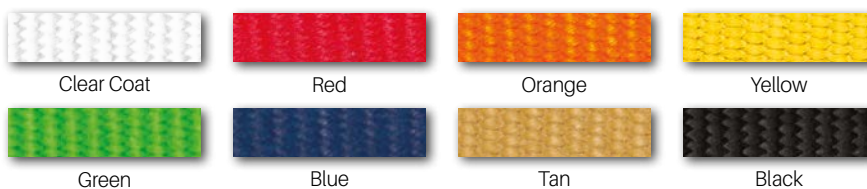

NFPA Colors Available


MADE IN  
**USA** ★



# MIL-SPIEC

Superior double jacket construction, combining 100% premium polyester ring spun staple and filament fibers over a heavy wall, ozone resistant, EPDM rubber liner or NSF-61 compliant polyurethane liner. The outer jacket is mildew resistant and treated with our special "Key-Lok" acrylic based polymer impregnation for maximum abrasion and moisture resistance. Rugged, easy to handle and built to withstand every changing environment.


## DOUBLE JACKET ATTACK HOSE

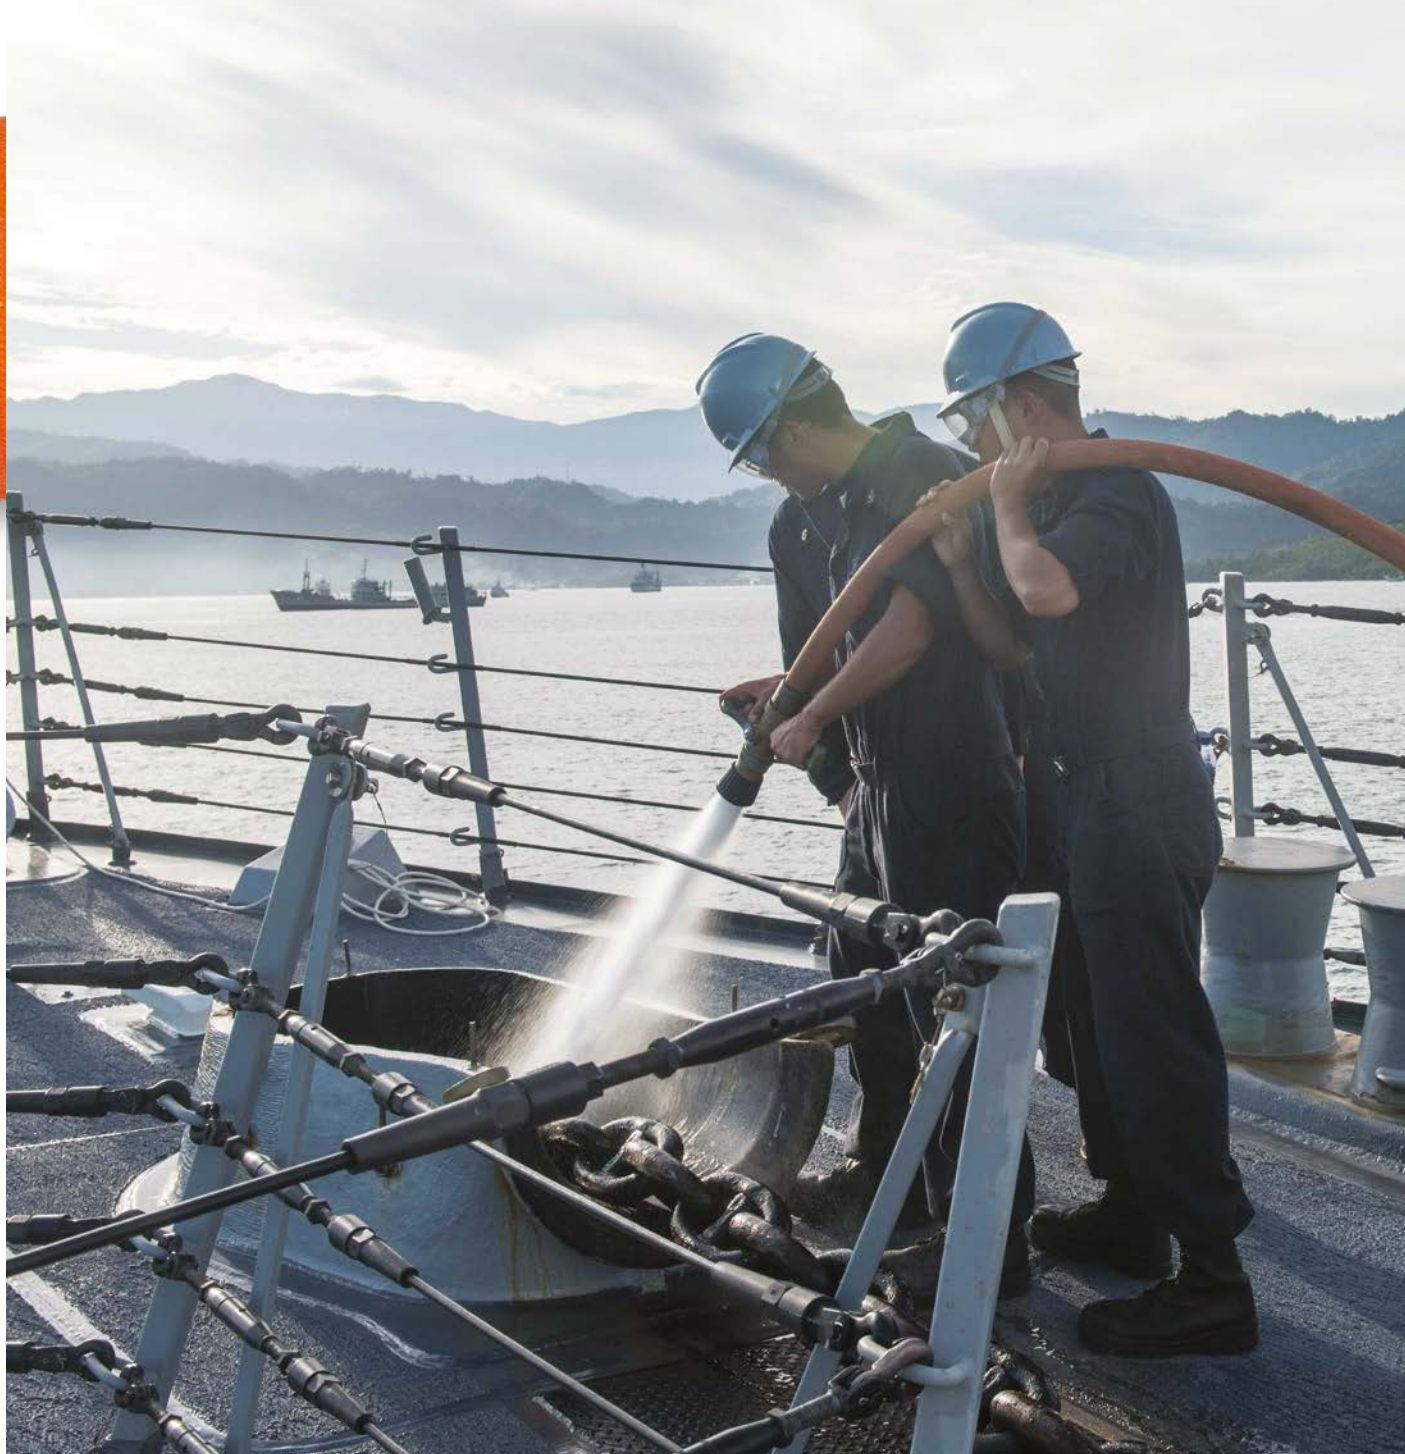



# HEAVY DUTY RUBBER LINED HOSE

This dependable, double jacket hose is tested to 600 psi, meets MIL-H-24606 latest edition and is UL Listed\*. Features a 10-year warranty and lifetime liner delamination guarantee. Unless otherwise specified, each length of hose shall be fitted with a set of cast or forged brass couplings. Couplings shall conform to TYPE A, Style 1 or WW-C-621 Federal Standards.

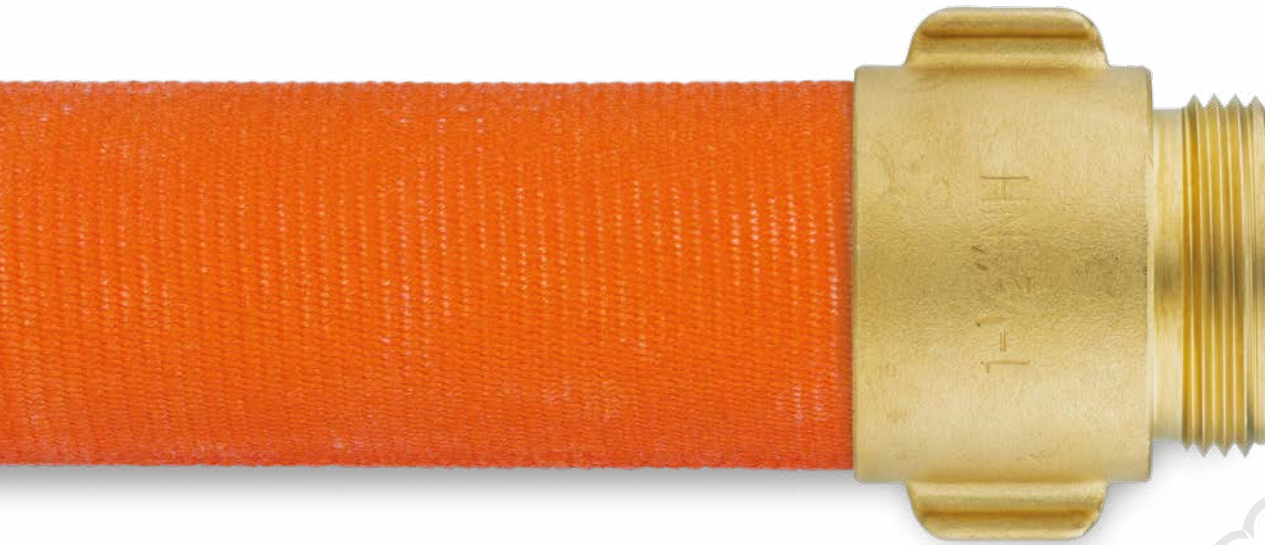

| Diameter | Part No.   | Service Test | Proof Test | Burst Test | Bowl Size | Weight Uncoupled |
|----------|------------|--------------|------------|------------|-----------|------------------|
| *1 1/2"  | DP15-600   | 300 psi      | 600 psi    | 900 psi    | 1 15/16"  | 0.34 lbs/ft      |
| 1 1/2"   | DP15-600PU | 300 psi      | 600 psi    | 900 psi    | 1 15/16"  | 0.28 lbs/ft      |
| *1 3/4"  | DP17-600   | 300 psi      | 600 psi    | 900 psi    | 2 1/8"    | 0.38 lbs/ft      |
| *2 1/2"  | DP25-600   | 300 psi      | 600 psi    | 900 psi    | 3"        | 0.54 lbs/ft      |
| 2 1/2"   | DP25-600PU | 300 psi      | 600 psi    | 900 psi    | 3"        | 0.46 lbs/ft      |
| *4"      | DP40-600   | 300 psi      | 600 psi    | 900 psi    | 4 1/2"    | 0.82 lbs/ft      |

\*UL Listed



Orange



Blue

MADE IN  
**USA** ★






# FLAME OUT

Mine Safety and Health Administration approved, this lightweight jacketed and rubber lined fire hose features self-extinguishing properties and is guaranteed to meet the demands of underground fire fighting. Extremely heat and cold resistant and available in single jacket or double jacket construction with high quality polyester reinforced outer jacket and durable MSHA Approved rubber liner.

## **SINGLE/DOUBLE** JACKET MINE HOSE

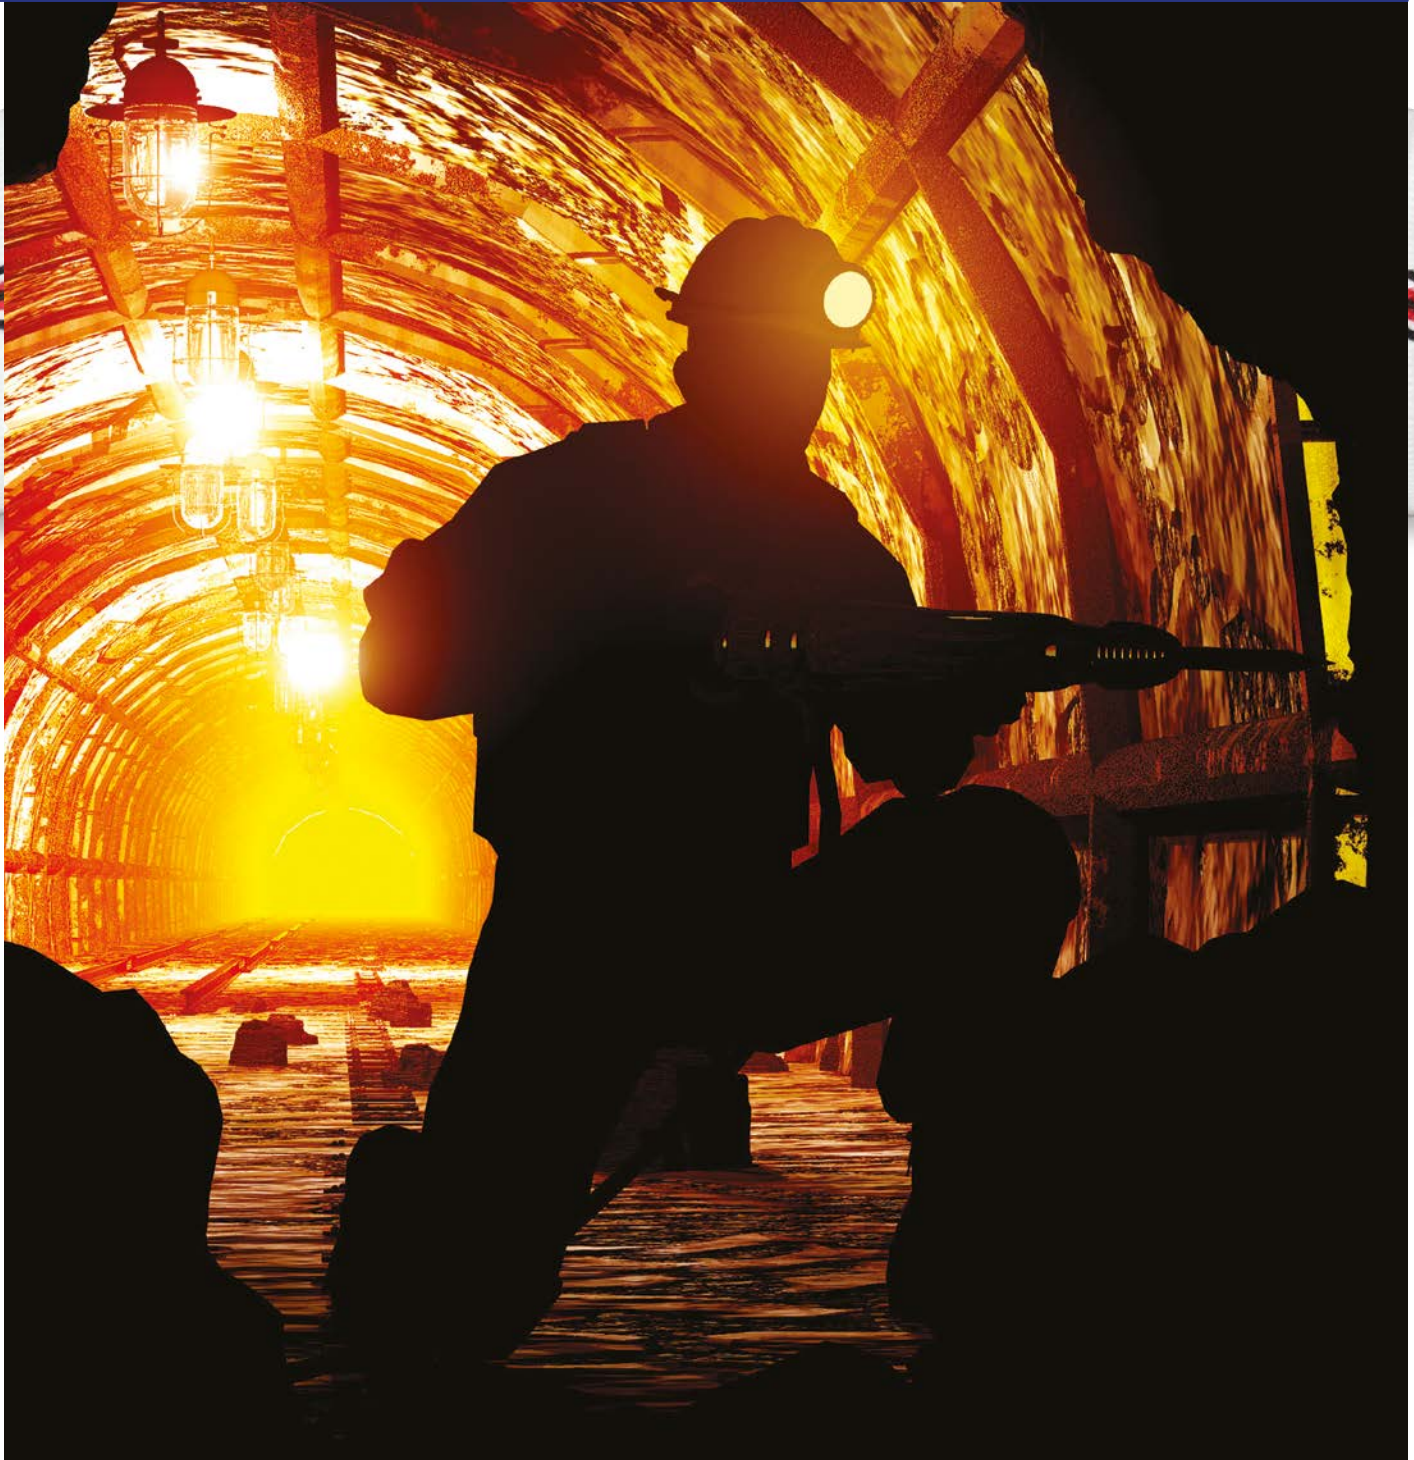



# MSHA APPROVED MINE HOSE

All polyester outer jackets provide superior cut, puncture and abrasion resistance while enhancing protection of a kink resistant rubber liner that guarantees reliable flow. Compact design easily stores on racks or reels. Couplings are internal expansion ring threaded or as required by purchaser.



| Diameter | Part No.  | Service Test | Proof Test | Burst Test | Bowl Size                         | Weight Uncoupled |
|----------|-----------|--------------|------------|------------|-----------------------------------|------------------|
| 1½"      | SP15-MSHA | 300 psi      | 600 psi    | 900 psi    | 1¾"                               | 0.23 lbs/ft      |
| 2"       | SP20-MSHA | 300 psi      | 600 psi    | 900 psi    | 2¼"                               | 0.33 lbs/ft      |
| 2½"      | SP25-MSHA | 300 psi      | 600 psi    | 900 psi    | 2¾"                               | 0.39 lbs/ft      |
| 1½"      | DP15-MSHA | 400 psi      | 800 psi    | 1200 psi   | 1 <sup>15</sup> / <sub>16</sub> " | 0.38 lbs/ft      |
| 2"       | DP20-MSHA | 400 psi      | 800 psi    | 1200 psi   | 2 <sup>2</sup> / <sub>5</sub> "   | 0.46 lbs/ft      |
| 2½"      | DP25-MSHA | 400 psi      | 800 psi    | 1200 psi   | 3"                                | 0.64 lbs/ft      |



White

MADE IN  
**USA**★



MSHA Approved and  
Certified Acceptance  
Number 18-FHA100001



# DURA-FLOW

The lightweight, small diameter, rubber covered attack hose that packs a big punch. The heat and chemical resistant, nitrile/PVC through-the-weave design provides peak performance and maximum flow. With a test pressure of 600 psi, Dura-Flow clearly outperforms conventional rubber covered attack lines.


## RUBBER COVERED ATTACK HOSE





# LIGHTWEIGHT, HIGH PERFORMANCE HOSE

A rugged, thick ribbed outer jacket construction makes the hose highly resistant to kink, impact, punctures, cuts and abrasion. Ozone resistant, maintenance-free and no drying required, make Dura-Flow a reliable weapon in a firefighter's arsenal. NFPA compliant and UL Listed\*. Dura-Flow coupling options are as required by purchaser, expansion ring threaded, Storz clamp ring, etc.

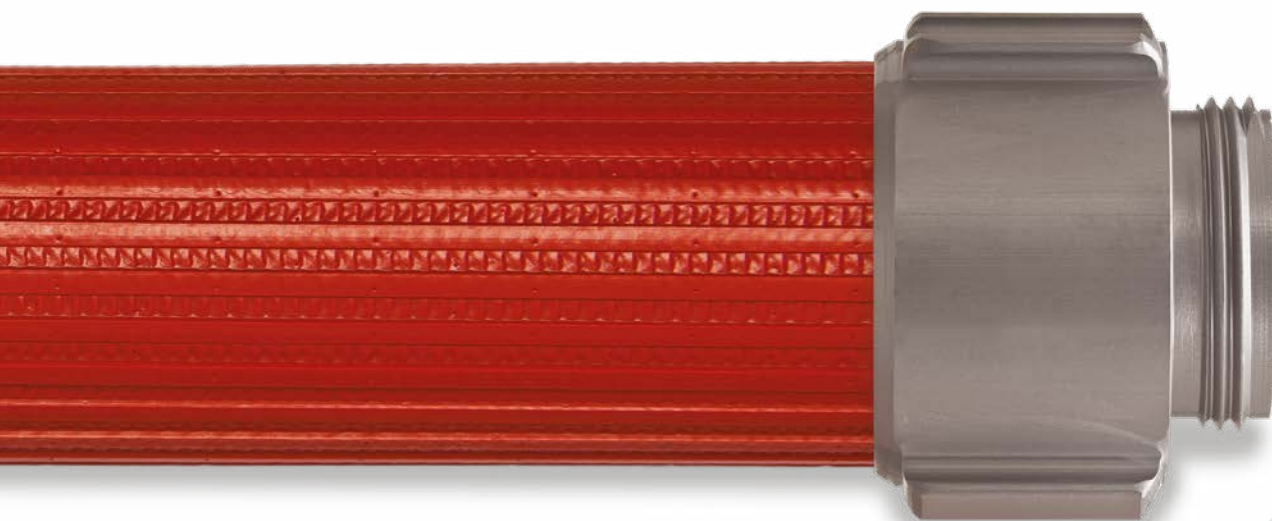

| Diameter                         | Part No. | Service Test | Proof Test | Burst Test | Bowl Size                         | Weight Uncoupled |
|----------------------------------|----------|--------------|------------|------------|-----------------------------------|------------------|
| 1"                               | RC10-600 | 300 psi      | 600 psi    | 900 psi    | 1 <sup>3</sup> / <sub>16</sub> "  | 0.15 lbs/ft      |
| 1 <sup>1</sup> / <sub>2</sub> "  | RC15-600 | 300 psi      | 600 psi    | 900 psi    | 1 <sup>13</sup> / <sub>16</sub> " | 0.24 lbs/ft      |
| *1 <sup>3</sup> / <sub>4</sub> " | RC17-600 | 300 psi      | 600 psi    | 900 psi    | 1 <sup>15</sup> / <sub>16</sub> " | 0.28 lbs/ft      |
| 2"                               | RC20-600 | 300 psi      | 600 psi    | 900 psi    | 2 <sup>1</sup> / <sub>4</sub> "   | 0.32 lbs/ft      |
| *2 <sup>1</sup> / <sub>2</sub> " | RC25-600 | 300 psi      | 600 psi    | 900 psi    | 2 <sup>13</sup> / <sub>16</sub> " | 0.48 lbs/ft      |

\*UL Listed to 250 psi



Red



Yellow

Other colors available upon request



# PRO-FLOW

A lightweight, heat resistant, rubber covered hose that delivers superior flow every time, everywhere. Ozone and chemical resistant, the nitrile/PVC through-the-weave design allows the hose to expand under pressure — decreasing friction loss and increasing water flow. The ribbed rubber outer cover offers increased resistance to impact,

## RUBBER COVERED INDUSTRIAL HOSE





# HEAVY DUTY RUBBER COVERED HOSE

punctures and abrasion. Reliable, maintenance-free and requires no drying, makes this the ideal hose for dewatering, industrial fire fighting, large diameter supply hose and wash down on construction sites. NFPA compliant and UL Listed\*. Pro-Flow coupling options are as required by purchaser, expansion ring threaded, Storz clamp ring, etc.



| Diameter | Part No. | Service Test | Proof Test | Burst Test | Bowl Size                         | Weight Uncoupled |
|----------|----------|--------------|------------|------------|-----------------------------------|------------------|
| *1½"     | RC15-500 | 250 psi      | 500 psi    | 750 psi    | 1 <sup>13</sup> / <sub>16</sub> " | 0.22 lbs/ft      |
| 1¾"      | RC17-500 | 250 psi      | 500 psi    | 750 psi    | 1 <sup>15</sup> / <sub>16</sub> " | 0.25 lbs/ft      |
| *2"      | RC20-500 | 250 psi      | 500 psi    | 750 psi    | 2¼"                               | 0.30 lbs/ft      |
| *2½"     | RC25-500 | 250 psi      | 500 psi    | 750 psi    | 2 <sup>13</sup> / <sub>16</sub> " | 0.40 lbs/ft      |
| **3"     | RC30-600 | 300 psi      | 600 psi    | 900 psi    | 3¾"                               | 0.60 lbs/ft      |
| ***4"    | RC40-500 | 250 psi      | 500 psi    | 750 psi    | 4¼"                               | 0.74 lbs/ft      |
| ***5"    | RC50-450 | 225 psi      | 450 psi    | 675 psi    | 5¼"                               | 0.93 lbs/ft      |
| 6"       | RC60-450 | 200 psi      | 400 psi    | 600 psi    | 6¼"                               | 1.35 lbs/ft      |

\*UL Listed to 250 psi | \*\*UL Listed to 300 psi | \*\*\*UL Listed to 200 psi



Red



Yellow

Other colors available upon request



# INDUSTRIAL LICH

The workhorse of industrial hoses, featuring a rugged and reliable construction that has it all — heat/cold, chemical and ozone resistant. The nitrile/PVC through-the-weave design with smooth, reinforced inner liner that allows the hose to expand under pressure — increasing water flow and keeping friction loss to a minimum. The ribbed nitrile rubber cover lowers drag force and increases resistance to abrasion, oil, fuel and a wide range


## LAY FLAT SUPPLY HOSE





# LARGE DIAMETER LAY FLAT HOSE


of chemicals. Industrial LDH features an oversized inner diameter that is engineered to fit most couplings. Easy to deploy and easy to store, available in continuous lengths of up to 300'. As required by purchaser. Hose designed for Pierce, Bauer, USC Hi-Flow, Victaulic field replaceable or crimped couplings.

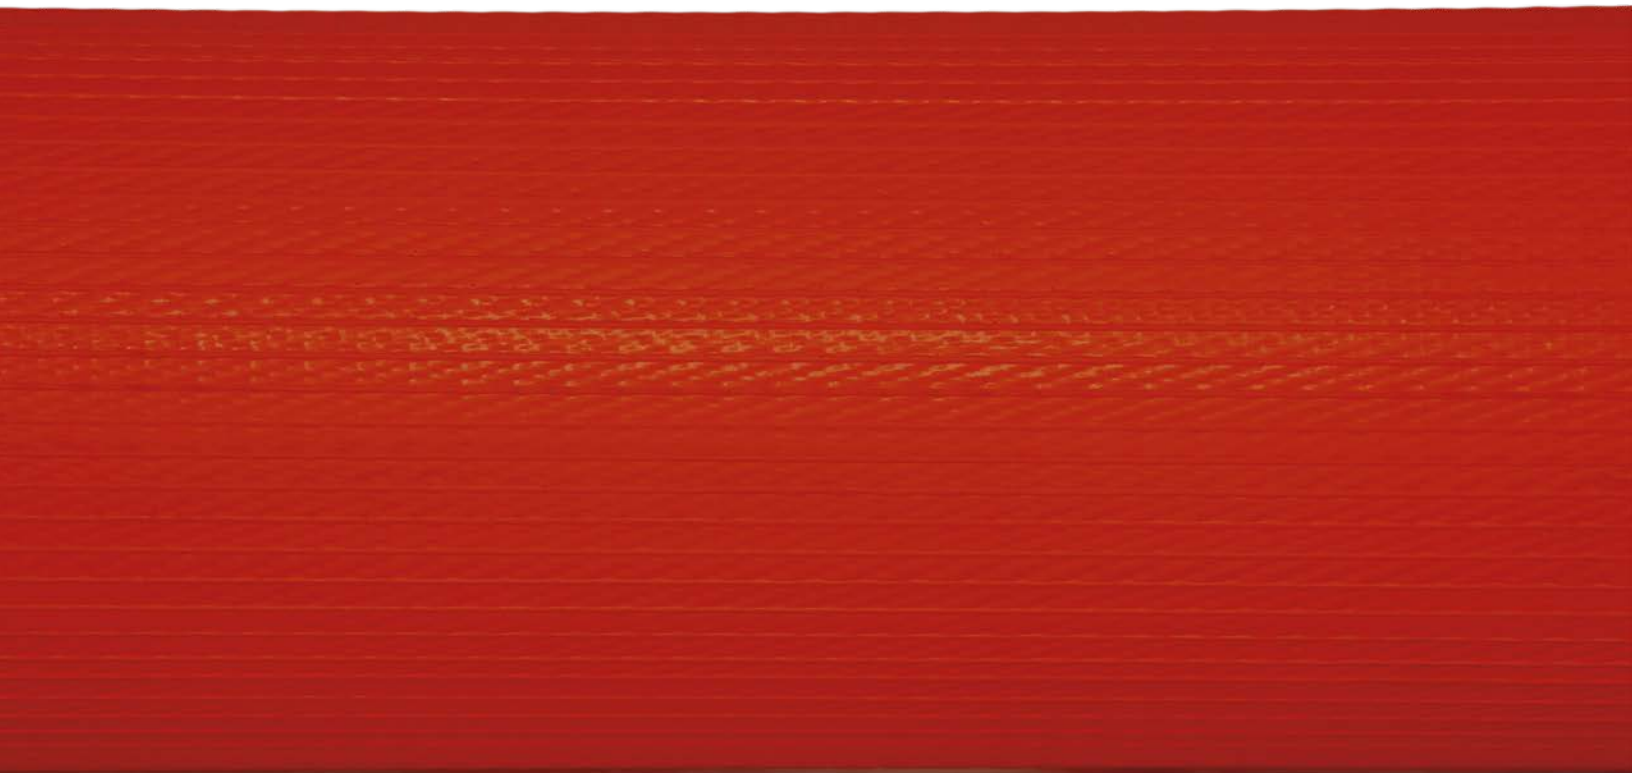

| Diameter | Part No.  | Service Test | Proof Test | Burst Test | Weight Uncoupled |
|----------|-----------|--------------|------------|------------|------------------|
| 4"       | RC40-500  | 250 psi      | 500 psi    | 750 psi    | 0.74 lbs/ft      |
| 6"       | RC60-300  | 150 psi      | 300 psi    | 450 psi    | 1.20 lbs/ft      |
| 8"       | RC80-300  | 150 psi      | 300 psi    | 450 psi    | 1.95 lbs/ft      |
| 10"      | RC100-300 | 150 psi      | 300 psi    | 450 psi    | 2.95 lbs/ft      |



Red



Black

Other colors available upon request

# RACK HOSE

## RACK AND REEL FIRE HOSE

All synthetic polyester and fully polyurethane lined, single jacket fire hose specifically designed for occupant use on interior fire fighting applications. Ideally suited for interior rack or reel service in office buildings, hospitals and manufacturing facilities. FM approved and manufactured in accordance with NFPA Standard 1961 latest edition. Hose is available pre-folded for ease of installation in standard pin racks and is available in lengths of 50', 75' and 100'. Choice of brass or aluminum couplings.

### SINGLE JACKET CABINET HOSE



**MADE IN USA** 

  
NFPA

  
FM  
APPROVED

| Diameter | Part No. | Service Test | Proof Test | Burst Test | Bowl Size | Weight Uncoupled |
|----------|----------|--------------|------------|------------|-----------|------------------|
| 1 1/2"   | RR15-500 | 250 psi      | 500 psi    | 750 psi    | 1 11/16"  | 0.12 lbs/ft      |

FM Approved



White



# REEL-LITE

## LIGHTWEIGHT BOOSTER HOSE

The industry's most durable and lightweight, high pressure booster hose featuring a rugged, abrasion and heat resistant single jacket polyester cover. Uniquely constructed using an interior helical reinforcement offering unmatched kink resistance that maintains hose shape and performance. Designed for use with 12" and larger drum reels and skid units. Available in lengths up to 100'.

### SEMI-RIGID ATTACK HOSE

| Diameter | Part No. | Service Test | Proof Test | Burst Test | Bowl Size | Weight 50' Coupled |
|----------|----------|--------------|------------|------------|-----------|--------------------|
| 1"       | RB10-800 | 400 psi      | 800 psi    | 1200 psi   | 1 5/16"   | 10 lbs             |



Red



Yellow

MADE IN  
USA



# '1061 PENCIL HOSE

## SINGLE JACKET USFS SPEC HOSE

Lightweight, circular woven fire hose technology incorporating high tensile, all polyester woven jacket and lined with high tensile NSF polyurethane. This 5/8" and 3/4" diameter hose features an 8" coil diameter and brass GHT threaded couplings with strain reliefs. Constructed to meet or exceed U.S. government federal specification 4210-01-167-1061 and ideally suited for rigorous forestry applications including pumper protection, mop-up and clean-up operations.

### LIGHTWEIGHT MOP-UP FORESTRY HOSE

| Diameter | Part No.  | Weight 50' Coupled |
|----------|-----------|--------------------|
| 5/8"     | FF058-300 | 1.3 lbs            |
| 3/4"     | FF075-600 | 1.5 lbs            |



Clear Coat



Red



Orange



Yellow



Green



Blue



Tan



Black

NFPA Colors Available



MADE IN  
USA

800.447.5666 | [keyhose.com](http://keyhose.com)




**keyhose.com**

800.447.5666 | Fax: 800.447.5664

P.O. Box 7107, Dothan, Alabama 36302

**Distributed by:**

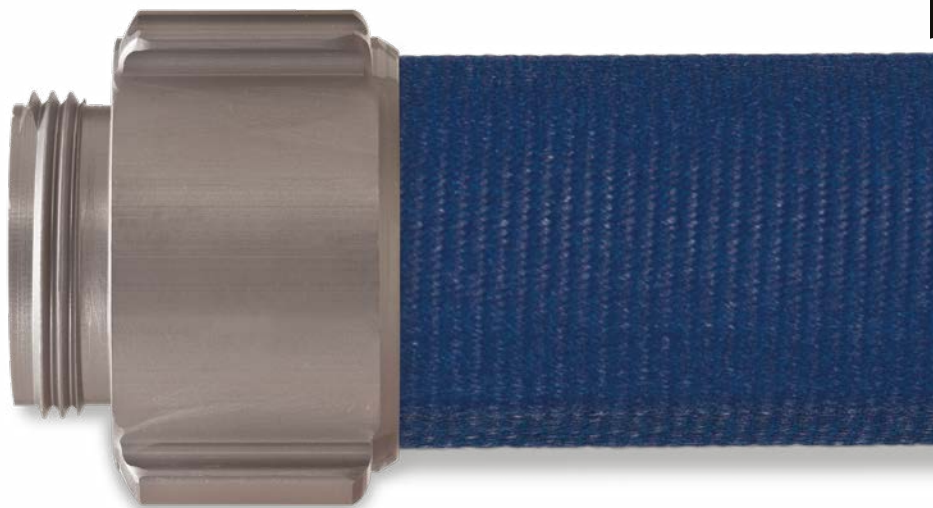

## WARRANTY

At Key, all hose products are subjected to the most stringent quality control standards in the industry. Our world-class manufacturing facilities combine innovative technology and equipment to ensure a consistent level of superior quality and timely delivery. Key hose products have a guaranteed service life ranging from one year to ten years. Refer to individual product specifications for exact warranty information.

*Key Hose reserves the right to modify any specification without prior notice to meet or exceed changing standards. For more information please contact a Key Hose authorized distributor.*

06/26